


RECTANGULAR PATTERN CONNECTOR (150-500 PSI)*

This rectangular pattern connector is ideal for making a quick disconnect at test break points. It is panel mounted and contains stainless steel tubulations. The sectioned side view of the drawing shows the front half of the connector which is not threaded. All of the holes are threaded in the TH half. Each side of the connector can have different tubulation sizes. "O" rings are incorporated on the threaded half (TH) connector.

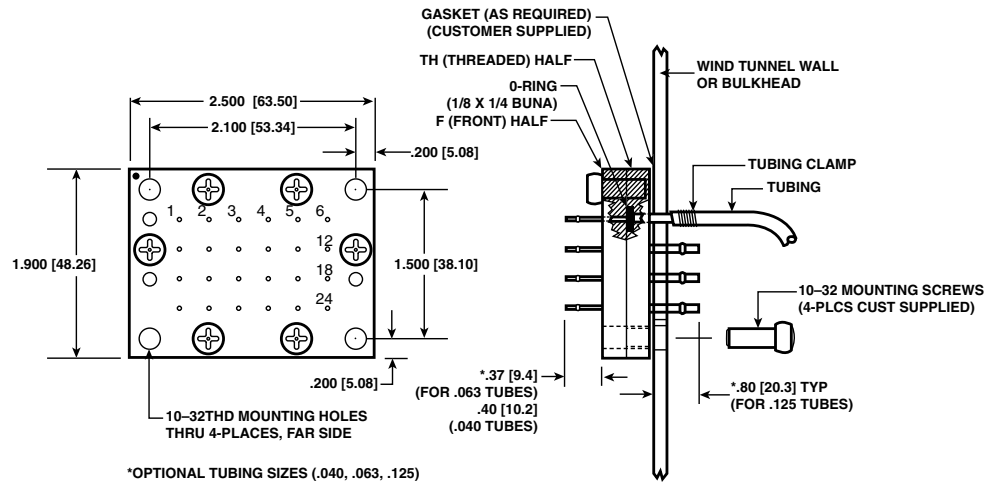

Dimension Inches (mm) — Standard Connector Size

No. of Rows	No. of Columns	No. of Px	Dimensions: Height x Length Inches (mm)	
2	4	8	1.3 x 1.9	(33 x 48.3)
2	5	10	1.3 x 2.2	(33 x 55.9)
3	4	12	1.6 x 1.9	(40.6 x 48.3)
4	4	16	1.9 x 1.9	(48.3 x 48.3)
3	6	18	1.6 x 2.5	(40.6 x 63.5)
4	5	20	1.9 x 2.2	(48.3 x 55.9)
4	6	24	1.9 x 2.5	(48.3 x 63.5)
4	8	32	1.9 x 3.1	(48.3 x 78.7)
4	10	40	1.9 x 3.7	(48.3 x 94.0)
6	6	36	2.5 x 2.5	(63.5 x 63.5)
6	8	48	2.5 x 3.1	(63.5 x 78.7)
5	10	50	2.2 x 3.7	(55.9 x 94)
6	9	54	2.5 x 3.4	(63.5 x 86.4)
6	10	60	2.5 x 3.7	(63.5 x 94)
8	8	64	3.1 x 3.1	(78.7 x 78.7)
8	12	96	3.1 x 4.3	(78.7 x 109.2)
10	10	100	3.7 x 3.7	(94 x 94)
10	12	120	3.7 x 4.3	(94 x 109.2)
12	12	144	4.3 x 4.3	(109.2 x 109.2)

To order, specify:

ScanCo # **RPC - 4R X 6T / 063F - 125TH**

Rectangular pattern connector

No. of rows of tubes


No. of columns of tubes

Tubulation dia.

Tubulation dia.

10-32 Thd mounting holes 4 ea.

The connector shown is a Model RPC-4RX7T/063F-063TH

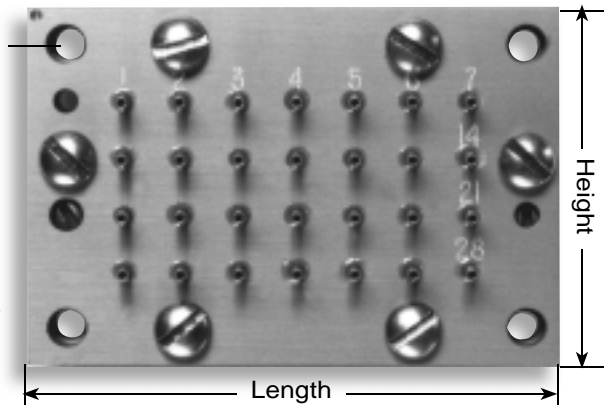

*150 psi for 144 tube connector. Small quantity tube connectors can go up to 500 psi.